



NK 40

Electric hose crimping machine for hoses up to 1 1/2" (DN38)

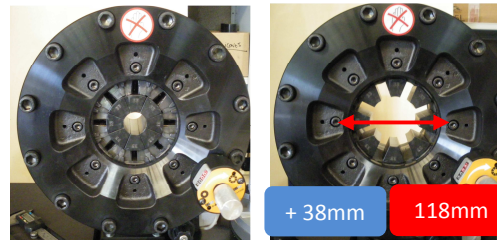

Large die opening = no need to remove dies
Radial die travel = easy positioning of fitting

Front flange cuts allow long drop elbows

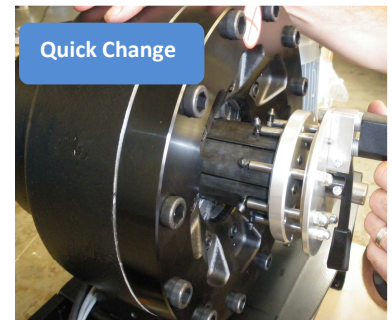

Quick Change

- ✓ Interlock Assemblies up to 1 1/4" (DN32)
- ✓ Ergonomic working space
- ✓ Ideal for long drop elbows
- ✓ Easy Greasing System

ACCESORIES AND OPTIONS

- Support Bench with die storage racks
- Individual Die storage racks
- Quick Change Tool

Technical specifications	
Max. Capacities : <i>For intermittent use of high pressure hose assembling</i>	2-SN et LP Industrial 2" (DN50; -32) 4-SP/R12 1.1/2" (DN38; -24) R13/R15/4-SH/Interlock 1 1/4" (DN32, -20) Limit with 2 x 90 elbows..... max.. 1.1/4" (DN32) Max crimp diameter 77mm (with Sp. Dies N° 70)
Motor / Electricity	3 kW - 400V 3-PH + Ground 50/60Hz (NK40E.1) Option : 3 kW - 230V 1-PH 50Hz or 60Hz
Radial Crimp force	200 tons
Opening with dies	∅ Die + 38mm
Opening without dies	118mm
Length of master dies	100mm
Machine Dimensions (mm)	Width : 800 x Depth : 440 x Height : 700
Net Weight (with oil HV32, no dies)	180 kgs
Standard Packing (for transport)	Wood crate conform to NIMP15 regulation Crate dimensions : 110x78x110cms, Gross Weight (with standard die package 9 sets) : 230 kgs
Noise Level	< 70 dB(A)

∅ Die	Die Length (mm)
6	56
10	56
12	56
15*	56
18*	56
21*	56
24*	70
27*	90
30	90
33*	90
39*	90
45	100
48*	100
51	100
57*	100
66	100

**Dies included in standard die package
9 sets for hoses 1/4" - 1 1/2"*

Machine assembled in France, Conform to CE standards

Technical data can be modified without prior notice, max. capacities are theoretical, given for a machine operated on a stable 400V 3-PH electricity network, max. capacities can vary according to type and brand of fittings and hoses.