



# NK 40 - PRO

Electric hose crimping machine for hoses up to 2" (DN50)

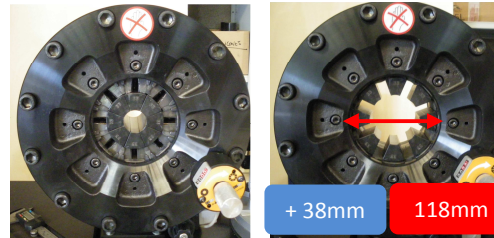

Large die opening = no need to remove dies  
Radial die travel = easy positioning of fitting

Front flange cuts allow  
long drop elbows

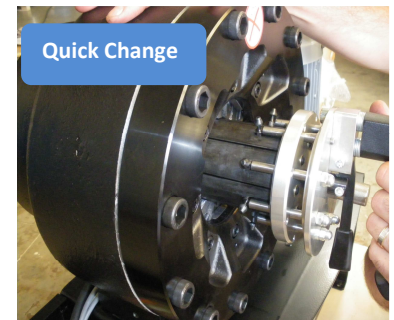

- ✓ Interlock Assemblies up to 1 1/4" (DN32)
- ✓ Ergonomic working space
- ✓ Ideal for long drop elbows
- ✓ Easy Greasing System

#### ACCESORIES AND OPTIONS

- Support Bench with die storage racks
- Individual Die storage racks
- Quick Change Tool

Technical specifications	
Max. Capacities : <i>For intermittent use of high pressure hose assembling</i>	2-SN et LP Industrial ..... 2" (DN50; -32) 4-SP/R12 ..... 2" (DN50; -32) R13/R15/4-SH/Interlock ..... 1 1/4" (DN32, -20) Limit with 2 x 90 elbows..... max.. 1.1/4" (DN32) Max crimp diameter ..... 77mm (with Sp. Dies N° 70)
Motor / Electricity	4 kW - 400V 3-PH + Ground 50/60Hz (NK40P.1) Option : 4 kW - 230V 1-PH 50Hz or 60Hz
Radial Crimp force	240 tons
Opening with dies	∅ Die + 38mm
Opening without dies	118mm
Length of master dies	100mm
Machine Dimensions (mm)	Width : 800 x Depth : 440 x Height :800
Net Weight (with oil HV32, no dies)	185 kgs
Standard Packing (for transport)	Wood crate conform to NIMP15 regulation Crate dimensions : 110x78x110cms, Gross Weight (with standard die package 10 sets) : 235 kgs
Noise Level	< 70 dB(A)

∅ Die	Die Length (mm)
6	56
10	56
12	56
15*	56
18*	56
21*	56
24*	70
27*	90
30	90
33*	90
39*	90
45	100
48*	100
51	100
57*	100
66*	100

*\*Dies included in standard die package  
10 sets for hoses 1/4" - 2"*

Machine assembled in France, Conform to CE standards

Technical data can be modified without prior notice, max. capacities are theoretical, given for a machine operated on a stable 400V 3-PH electricity network, max. capacities can vary according to type and brand of fittings and hoses.